









ISO Connection A SAE Single

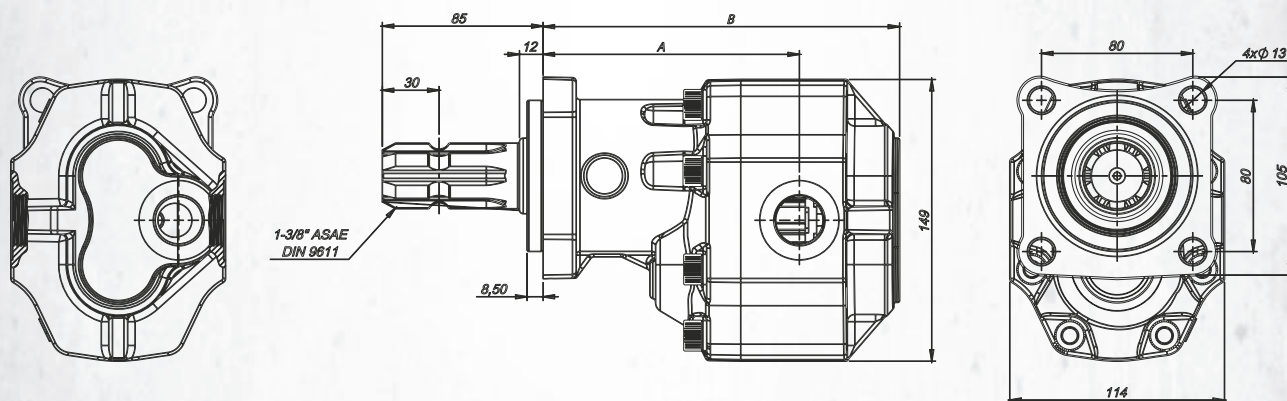

Code	1122ASAE012	1122ASAE017	1122ASAE027	1122ASAE034	1122ASAE043	1122ASAE051	1122ASAE061	1122ASAE073	1122ASAE082	1122ASAE092
Displacement cm ³ /rev	12	17	27	34	43	51	61	73	82	92
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R
Max. Cont. Pressure Bar	300	300	290	285	270	230	220	200	200	190
Max. Int. Pressure Bar	310	310	300	295	280	260	230	210	210	200
Max. Peak Pressure Bar	320	320	310	305	290	280	250	220	220	220
Max. Cont. Speed rpm	2600	2600	2600	2300	2100	2100	1800	1600	1500	1500
Max. Int. Speed rpm	3000	3000	3000	2900	2600	2600	1900	1800	1700	1700
A - B (mm)	124,5- 171,5	124,5- 171,5	129,5- 177,5	130,5- 182,5	135,5- 188,5	135,5- 193,5	142- 201,5	146- 212,5	146- 212,5	160- 225,5
Inlet - Outlet (inch)	G1/2" G1/2"	G1/2" G1/2"	G3/4" G1/2"	G3/4" G3/4"	G3/4" G3/4"	G1" G3/4"	G1" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"
Weight Kg	11	11,5	12,5	12,8	13,3	13,5	14	14,5	14,7	14,8



ISO Connection Bi-Direction A SAE

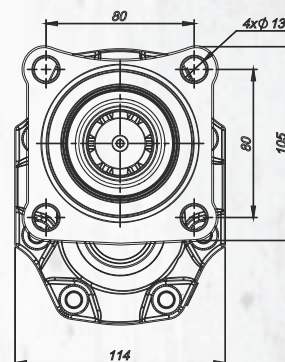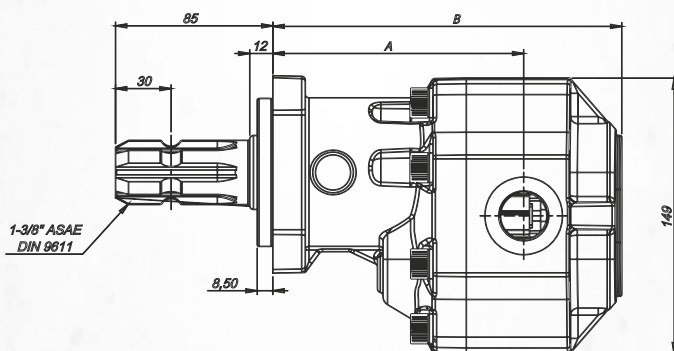

Code	1122ASAE012	1122ASAE017	1122ASAE027	1122ASAE034	1122ASAE043	1122ASAE051	1122ASAE061	1122ASAE073	1122ASAE082	1122ASAE092
Displacement cm ³ /rev	12	17	27	34	43	51	61	73	82	92
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	B	B	B	B	B	B	B	B	B	B
Max. Cont. Pressure Bar	300	300	290	285	270	230	220	200	200	190
Max. Int. Pressure Bar	310	310	300	295	280	260	230	210	210	200
Max. Peak Pressure Bar	320	320	310	305	290	280	250	220	220	220
Max. Cont. Speed rpm	2600	2600	2600	2300	2100	2100	1800	1600	1500	1500
Max. Int. Speed rpm	3000	3000	3000	2900	2600	2600	1900	1800	1700	1700
A - B (mm)	124,5- 171,5	124,5- 171,5	129,5- 177,5	130,5- 182,5	135,5- 188,5	135,5- 193,5	142- 201,5	146- 212,5	146- 212,5	160- 225,5
Inlet - Outlet (inch)	G1/2" G1/2"	G1/2" G1/2"	G1/2" G1/2"	G3/4" G3/4"	G3/4" G3/4"	G3/4" G3/4"	G1" G1"	G1" G1"	G1" G1"	G1" G1"
Weight Kg	11	11,5	12,5	12,8	13,3	13,5	14	14,5	14,7	14,8