



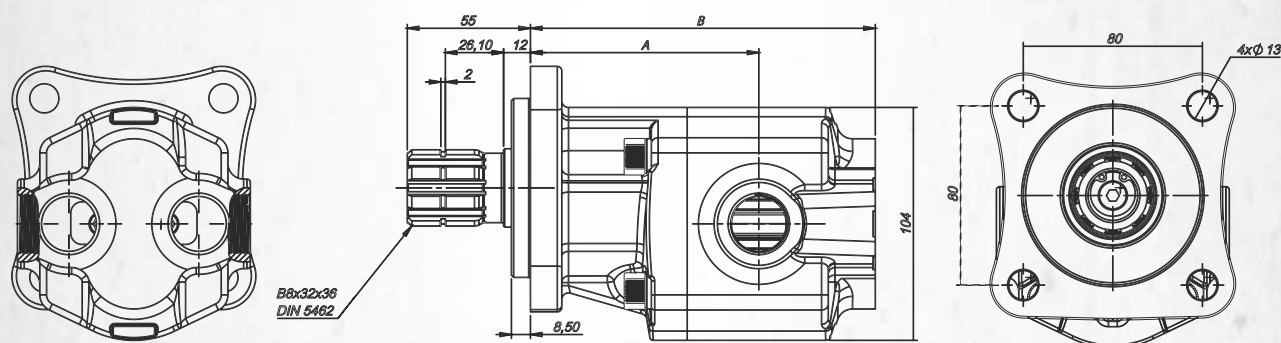

ISO Connection Bi-Direction



Code	1122206	11222010	11222016	11222020	11222025	11222032	11222040
Displacement cm ³ /rev	6	10	16	20	25	32	40
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	B	B	B	B	B	B	B
Max. Cont. Pressure Bar	280	280	280	260	220	190	180
Max. Int. Pressure Bar	300	300	300	280	250	200	190
Max. Peak Pressure Bar	330	330	330	300	270	220	200
Max. Cont. Speed rpm	2300	2300	2300	2300	2300	2100	1900
Max. Int. Speed rpm	3100	3100	3100	3100	3100	2900	2600
A - B (mm)	90-124	96-130	96-140	100-146	102-154	113-165	126-178
Inlet - Outlet (inch)	G1/2"-G1/2"	G1/2"-G1/2"	G1/2"-G1/2"	G1/2"-G1/2"	G3/4"-G3/4"	G3/4"-G3/4"	G3/4"-G3/4"
Weight Kg	6	6,5	6,9	7,3	7,5	8	8,5