









ISO Connection Single

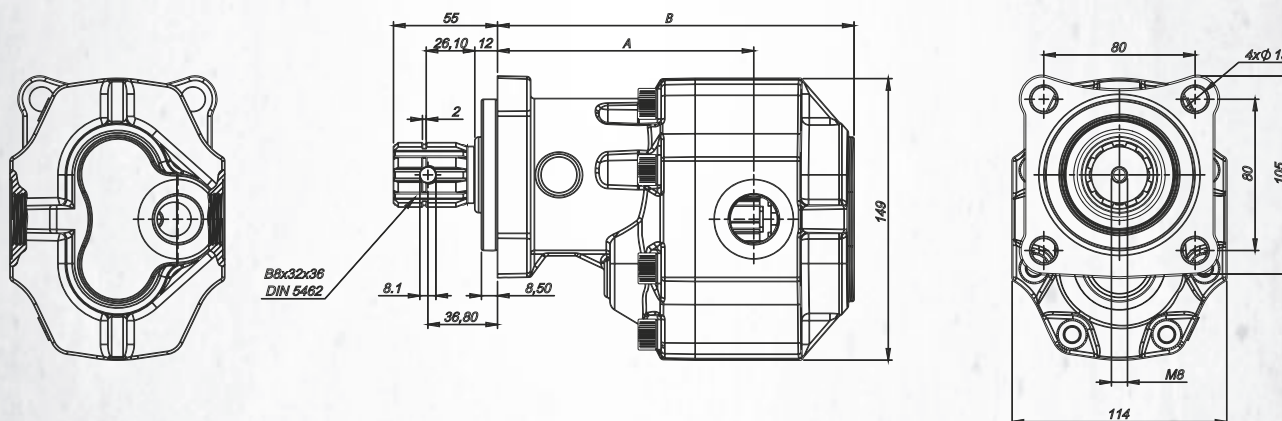

Code	11223012	11223017	11223027	11223034	11223043	11223051	11223061	11223073	11223082	11223092
Displacement cm ³ /rev	12	17	27	34	43	51	61	73	82	92
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R
Max. Cont. Pressure Bar	300	300	290	285	270	230	220	200	200	190
Max. Int. Pressure Bar	310	310	300	295	280	260	230	210	210	200
Max. Peak Pressure Bar	320	320	310	305	290	280	250	220	220	220
Max. Cont. Speed rpm	2600	2600	2600	2300	2100	2100	1800	1600	1500	1500
Max. Int. Speed rpm	3000	3000	3000	2900	2600	2600	1900	1800	1700	1700
A - B (mm)	124,5- 171,5	124,5- 171,5	129,5- 177,5	130,5- 182,5	135,5- 188,5	135,5- 193,5	142- 201,5	146- 212,5	146- 212,5	160- 225,5
Inlet - Outlet (inch)	G1/2" G1/2"	G1/2" G1/2"	G3/4" G1/2"	G3/4" G3/4"	G3/4" G3/4"	G1" G3/4"	G1" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"
Weight Kg	11	11,5	12,5	12,8	13,3	13,5	14	14,5	14,7	14,8



ISO Connection Bi-Direction

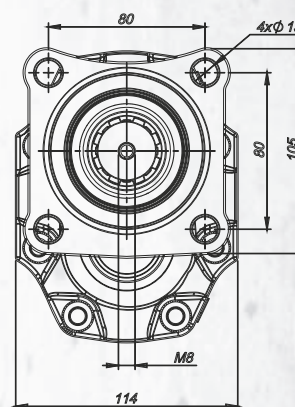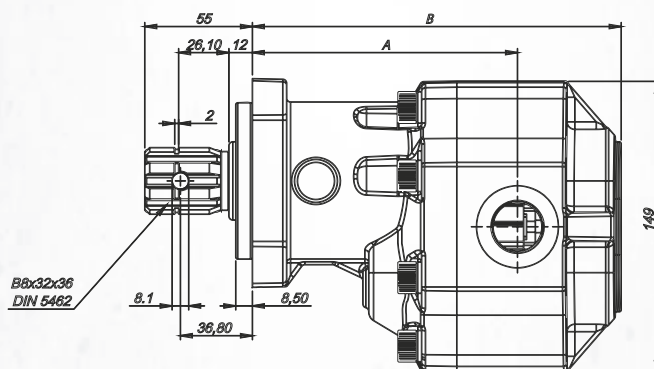

Code	11223012	11223017	11223027	11223034	11223043	11223051	11223061	11223073	11223082	11223092
Displacement cm ³ /rev	12	17	27	34	43	51	61	73	82	92
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	B	B	B	B	B	B	B	B	B	B
Max. Cont. Pressure Bar	300	300	290	285	270	230	220	200	200	190
Max. Int. Pressure Bar	310	310	300	295	280	260	230	210	210	200
Max. Peak Pressure Bar	320	320	310	305	290	280	250	220	220	220
Max. Cont. Speed rpm	2600	2600	2600	2300	2100	2100	1800	1600	1500	1500
Max. Int. Speed rpm	3000	3000	3000	2900	2600	2600	1900	1800	1700	1700
A - B (mm)	124,5- 171,5	124,5- 171,5	129,5- 177,5	130,5- 182,5	135,5- 188,5	135,5- 193,5	142- 201,5	146- 212,5	146- 212,5	160- 225,5
Inlet - Outlet (inch)	G1/2" G1/2"	G1/2" G1/2"	G1/2" G1/2"	G3/4" G3/4"	G3/4" G3/4"	G3/4" G3/4"	G1" G1"	G1" G1"	G1" G1"	G1" G1"
Weight Kg	11	11,5	12,5	12,8	13,3	13,5	14	14,5	14,7	14,8