







## ISO Connection Single

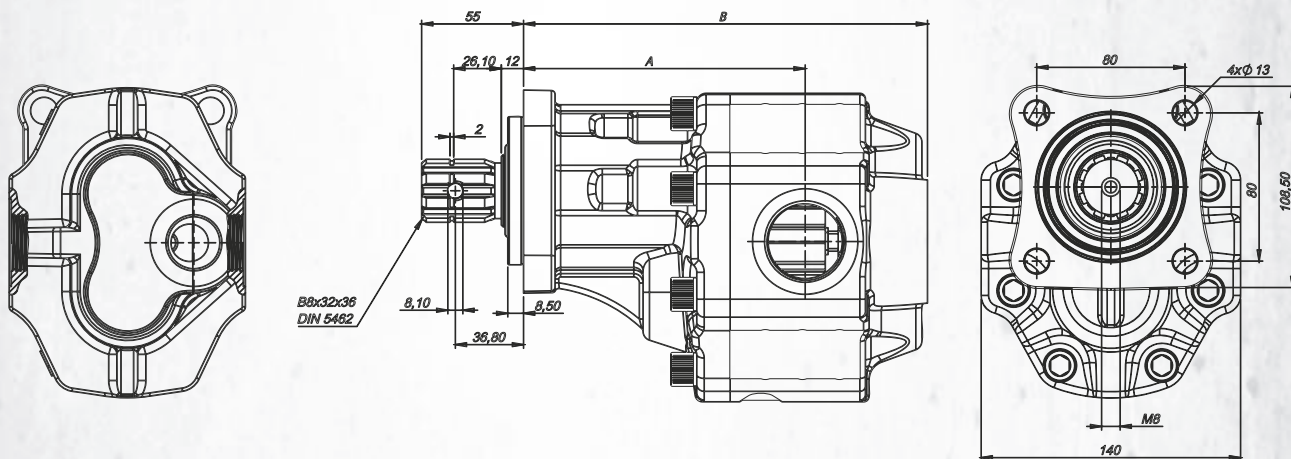

| Code                                                         | 11223560   | 11223573       | 11223590       | 112235100      | 112235110      |
|--------------------------------------------------------------|------------|----------------|----------------|----------------|----------------|
| Displacement<br>cm <sup>3</sup> /rev                         | 60         | 73             | 90             | 100            | 110            |
| Rotation:<br>L: Left (ccw)<br>R: Right (cw)<br>B: Bi-Direct. | L/R        | L/R            | L/R            | L/R            | L/R            |
| Max. Cont. Pressure<br>Bar                                   | 250        | 245            | 240            | 230            | 220            |
| Max. Int. Pressure<br>Bar                                    | 270        | 260            | 250            | 240            | 230            |
| Max. Peak Pressure<br>Bar                                    | 290        | 280            | 270            | 260            | 250            |
| Max. Cont. Speed<br>rpm                                      | 1800       | 1800           | 1800           | 1800           | 1800           |
| Max. Int. Speed<br>rpm                                       | 2500       | 2500           | 2500           | 2500           | 2500           |
| A - B<br>(mm)                                                | 146-205    | 148-214        | 152-218        | 153-236        | 154,5-230      |
| Inlet - Outlet<br>(inch)                                     | G1"<br>G1" | G1 1/4"<br>G1" | G1 1/4"<br>G1" | G1 1/4"<br>G1" | G1 1/4"<br>G1" |
| Weight<br>Kg                                                 | 17,1       | 17,5           | 18,1           | 18,4           | 18,7           |



## ISO Connection Bi-Direction

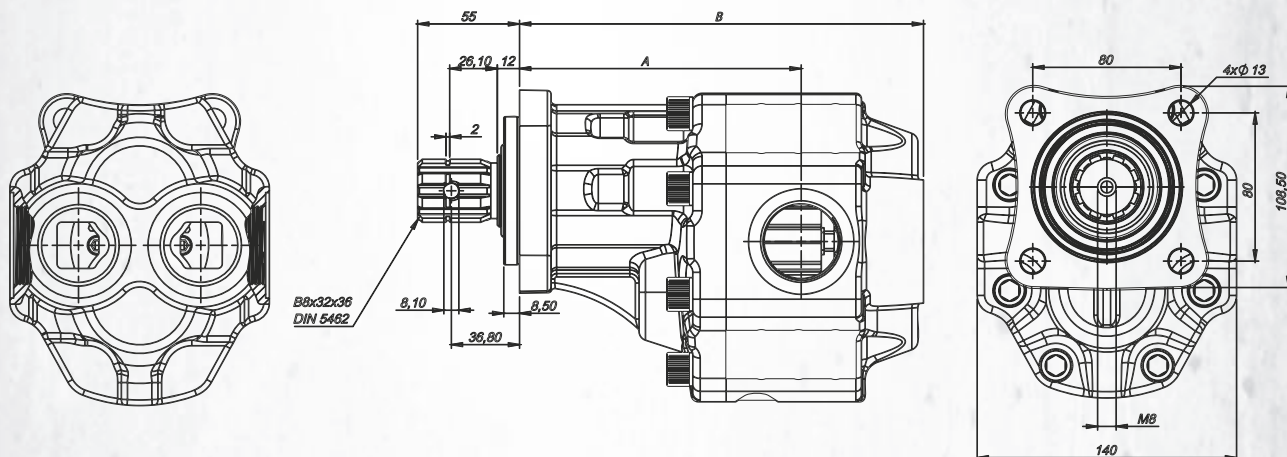

| Code                                                         | 11223560   | 11223573       | 11223590       | 112235100      | 112235110      |
|--------------------------------------------------------------|------------|----------------|----------------|----------------|----------------|
| Displacement<br>cm <sup>3</sup> /rev                         | 60         | 73             | 90             | 100            | 110            |
| Rotation:<br>L: Left (ccw)<br>R: Right (cw)<br>B: Bi-Direct. | B          | B              | B              | B              | B              |
| Max. Cont. Pressure<br>Bar                                   | 250        | 245            | 240            | 230            | 220            |
| Max. Int. Pressure<br>Bar                                    | 270        | 260            | 250            | 240            | 230            |
| Max. Peak Pressure<br>Bar                                    | 290        | 280            | 270            | 260            | 250            |
| Max. Cont. Speed<br>rpm                                      | 1800       | 1800           | 1800           | 1800           | 1800           |
| Max. Int. Speed<br>rpm                                       | 2500       | 2500           | 2500           | 2500           | 2500           |
| A - B<br>(mm)                                                | 146-205    | 148-214        | 152-218        | 153-236        | 154,5-230      |
| Inlet - Outlet<br>(inch)                                     | G1"<br>G1" | G1 1/4"<br>G1" | G1 1/4"<br>G1" | G1 1/4"<br>G1" | G1 1/4"<br>G1" |
| Weight<br>Kg                                                 | 17,1       | 17,5           | 18,1           | 18,4           | 18,7           |