

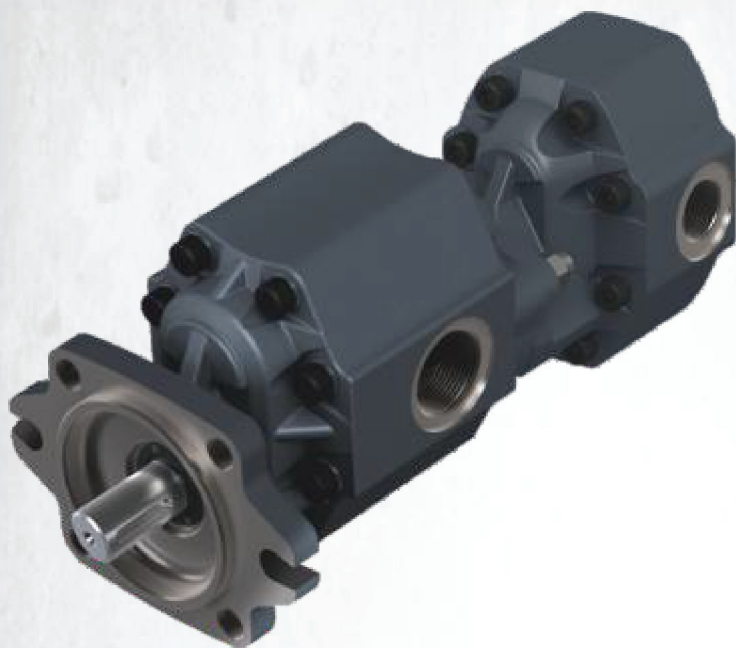


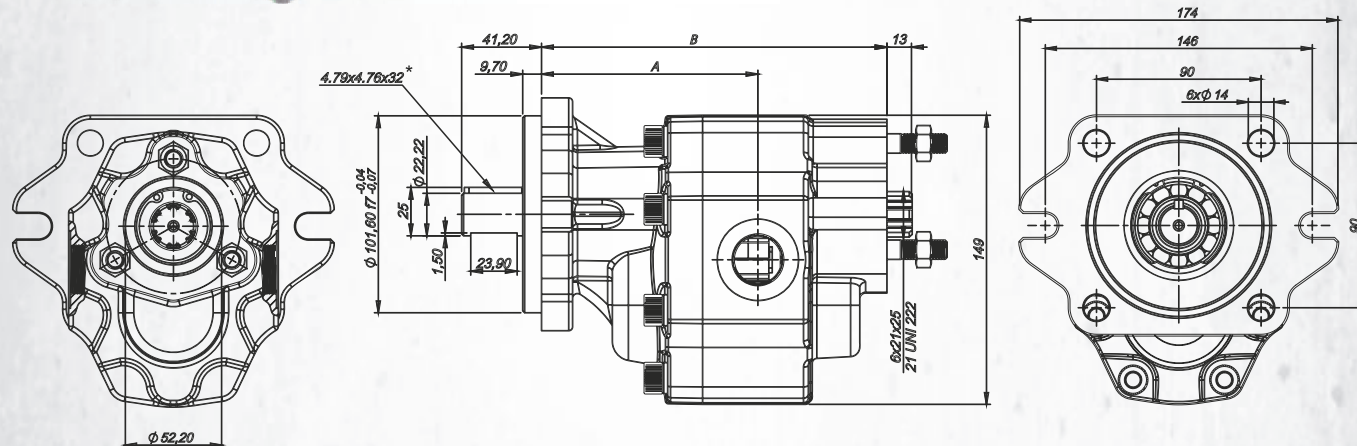

SAE B TANDEM Spline



* Option with spline 6,35x6,35x25,4 can be ordered

Code	1123S317+	1123S327+	1123S334+	1123S343+	1123S351+	1123S361+	1123S373+	1123S382+	1123S392+
Displacement cm ³ /rev	17	27	34	43	51	61	73	82	92
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R	L/R
Max. Cont. Pressure Bar	300	290	285	270	230	220	200	200	190
Max. Int. Pressure Bar	310	300	295	280	260	230	210	210	200
Max. Peak Pressure Bar	320	310	305	290	280	250	220	220	220
Max. Cont. Speed rpm	2600	2600	2300	2100	2100	1800	1600	1500	1500
Max. Int. Speed rpm	3000	3000	2900	2600	2600	1900	1800	1700	1700
A - B (mm)	101-161	105-167	107-172	111,5-176	112-181	117-191	124,5-202	124,5-202	137-210
Inlet - Outlet (inch)	G1/2" G1/2"	G3/4" G1/2"	G3/4" G3/4"	G3/4" G3/4"	G1" G3/4"	G1" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"
Weight Kg	11,5	12,5	12,8	13,3	13,5	14	14,5	14,7	15,5