

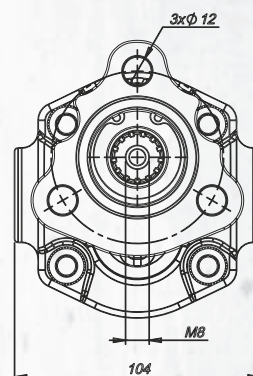
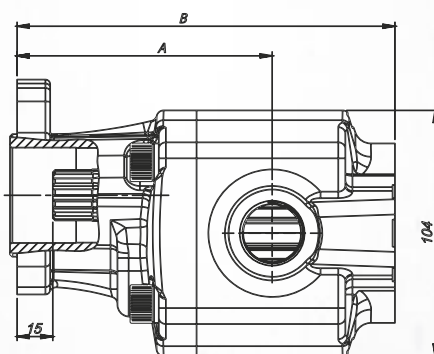




UNI Connection Bi-Direction



Code	1121206	11212010	11212016	11212020	11212025	11212032	11212040
Displacement cm ³ /rev	6	10	16	20	25	32	40
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	B	B	B	B	B	B	B
Max. Cont. Pressure Bar	280	280	280	260	220	190	180
Max. Int. Pressure Bar	300	300	300	280	250	200	190
Max. Peak Pressure Bar	330	330	330	300	270	220	200
Max. Cont. Speed rpm	2300	2300	2300	2300	2300	2100	1900
Max. Int. Speed rpm	3100	3100	3100	3100	3100	2900	2600
A - B (mm)	96-130	102-136	102-146	106-152	108-160	119-171	132-184
Inlet - Outlet (inch)	G1/2"-G1/2"	G1/2"-G1/2"	G1/2"-G1/2"	G1/2"-G1/2"	G3/4"-G3/4"	G3/4"-G3/4"	G3/4"-G3/4"
Weight Kg	5	5,5	5,8	6	6,1	6,3	6,5