







UNI Connection Single

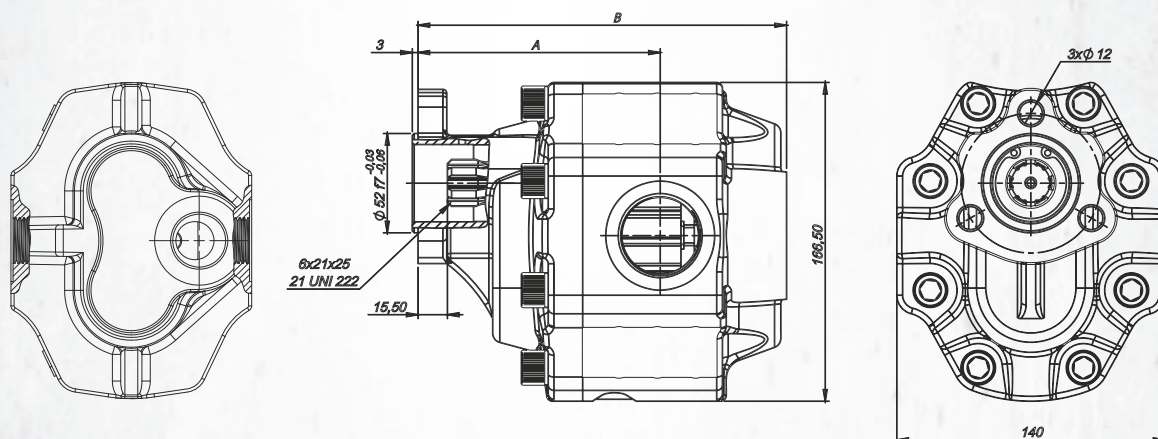

Code	11213560	11213573	11213590	112135100	112135110
Displacement cm ³ /rev	60	73	90	100	110
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	L/R	L/R	L/R	L/R	L/R
Max. Cont. Pressure Bar	250	245	240	230	220
Max. Int. Pressure Bar	270	260	250	240	230
Max. Peak Pressure Bar	290	280	270	260	250
Max. Cont. Speed rpm	1800	1800	1800	1800	1800
Max. Int. Speed rpm	2500	2500	2500	2500	2500
A - B (mm)	146-205	148-214	152-218	153-236	154,5-230
Inlet - Outlet (inch)	G1" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"
Weight Kg	16,1	16,5	17,1	17,4	17,7



UNI Connection Bi-Direction

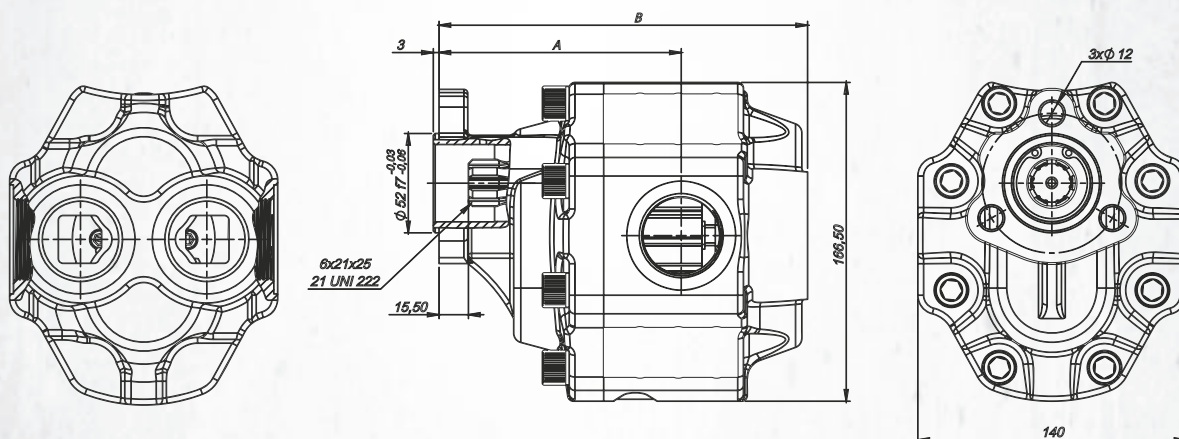

Code	11213560	11213573	11213590	112135100	112135110
Displacement cm ³ /rev	60	73	90	100	110
Rotation: L: Left (ccw) R: Right (cw) B: Bi-Direct.	B	B	B	B	B
Max. Cont. Pressure Bar	250	245	240	230	220
Max. Int. Pressure Bar	270	260	250	240	230
Max. Peak Pressure Bar	290	280	270	260	250
Max. Cont. Speed rpm	1800	1800	1800	1800	1800
Max. Int. Speed rpm	2500	2500	2500	2500	2500
A - B (mm)	146-205	148-214	152-218	153-236	154,5-230
Inlet - Outlet (inch)	G1" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"	G1 1/4" G1"
Weight Kg	16,1	16,5	17,1	17,4	17,7