

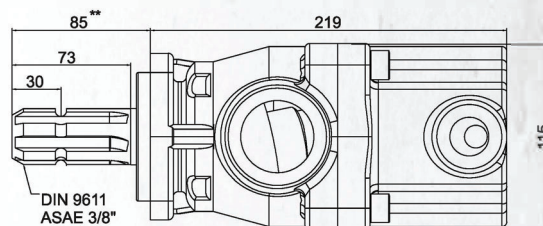




High Pressure Piston Pump
ASAE Connection
Single Flow
Bi Directional

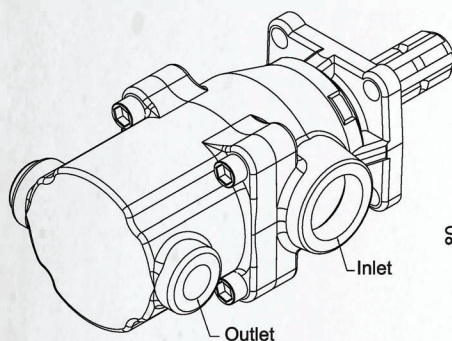

*Direction is Bi-Directional

*Nitration body

*Nodular cast iron 3G-40 body and cover

*Forged steel 8620 of Crank and annealing 58-60 HRC with 1,5mm depth

*Used 2 bearing is same pump; one of is 31308 Timken Bearing and other one is special designed in 3 stage

*Used bushing as Federalmogul and GGB brands

*Used 2 felts and one of them is viton

**The length of connection shaft can be set as 105 mm

**To order pump with 105 mm shaft change the last letter of the code to 'L' (f.e.120H60HSAL)

Code	120H27HSAS	120H30HSAS	120H41HSAS	120H55HSAS	120H60HSAS
Capacity	27	30	41	55	60
l/min rpm 1000	27,0	30,0	41,0	55,0	60,0
Displacement cm ³ /rev	27,0	30,0	41,0	55,0	60,0
Working Pressure (Bar)	350	350	350	350	350
Max. Pressure (Bar)	600	600	600	600	600
Inlet/Outlet	R 1"1/2 R 3/4"	R 1"1/2 R 3/4"	R 1"1/2 R 3/4"	R 1"1/2 R 3/4"	R 1"1/2 R 3/4"
Weight Kg	13,75	13,75	14,25	14,25	14,25