

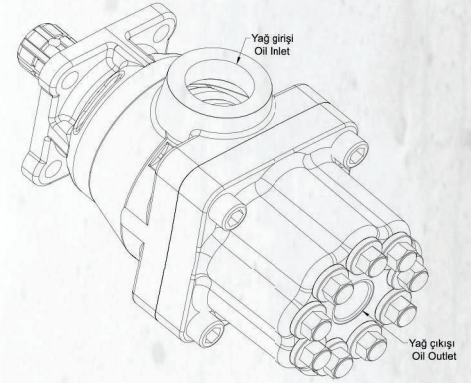


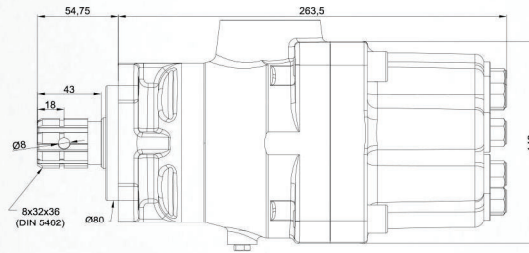

High Pressure Piston Pump
 ISO Connection
 Single Flow
 Bi-Directional
 8x32x36
 DIN 5462



*Direction is Bi-Directional

*Nitration body

*Nodular cast iron 3G-40 body and cover

*Forged steel 8620 of Crank and annealing 58-60 HRC with 1,5mm depth

*Used 2 bearing is same pump; one of is 31308 Timken Bearing and other one is special designed in 3 stage

*Used bushing as Federalmogul and GGB brands

*Used 2 felts and one of them is viton

Code	129H70H	129H80H	129H90H	129H105H
Capacity	70	80	90	105
l/min rpm 1000	70,0	80,0	90,0	105,0
Displacement cm ³ /rev	70,0	80,0	90,0	105,0
Working Pressure (Bar)	350	350	350	350
Max. Pressure (Bar)	600	600	600	600
Inlet/Outlet	R 1"1/2 R 1"	R 1"1/2 R 1"	R 1"1/2 R 1"	R 1"1/2 R 1"
Weight Kg	22,5	22,5	22,5	23