

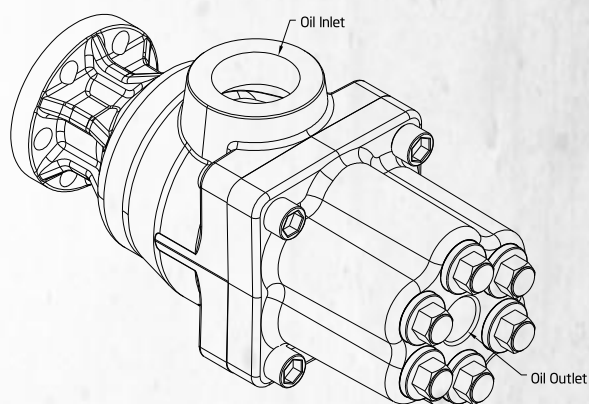


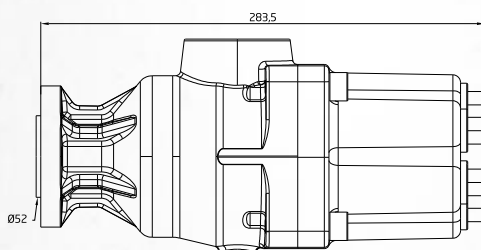

High Pressure Piston Pump
UNI Connection
Single Flow
Bi-Directional



- *Direction is Bi-Directional
- *Nitration body
- *Nodular cast iron 3G-40 body and cover
- *Forged steel 8620 of Crank and annealing 58-60 HRC with 1,5mm depth
- *Used 2 bearing is same pump; one of is 31308 Timken Bearing and other one is special designed in 3 stage
- *Used bushing as Federalmogul and GGB brands
- *Used 2 felts and one of them is viton

Code	110H18H	110H20H	110H24H	110H27H	110H36H	110H41H	110H48H	110H55H
Capacity	18	20	24	27	36	41	48	55
l/min rpm 1000	18,0	20,0	24,0	27,0	36,0	40,5	48,0	55,0
Displacement cm ³ /rev	18,0	20,0	24,0	27,0	36,0	40,5	48,0	55,0
Working Pressure (Bar)	350	350	350	350	350	350	350	350
Max. Pressure (Bar)	600	600	600	600	600	600	600	600
Inlet/Outlet	R1"1/2 R3/4"	R1"1/2 R3/4"	R1"1/2 R3/4"	R1"1/2 R3/4"	R1"1/2 R3/4"	R1"1/2 R3/4"	R1"1/2 R3/4"	R1"1/2 R3/4"
Weight Kg	14,5	14,5	14,5	14,5	14,5	14,5	14,5	14,5